


Handheld **Ultrasonic** Pneumatic Drill



- Empowered by **Ultrasonic Drilling**
- Applicable for Composites and Hard-to-Cut Metals
- Significant Hole Quality Improvement

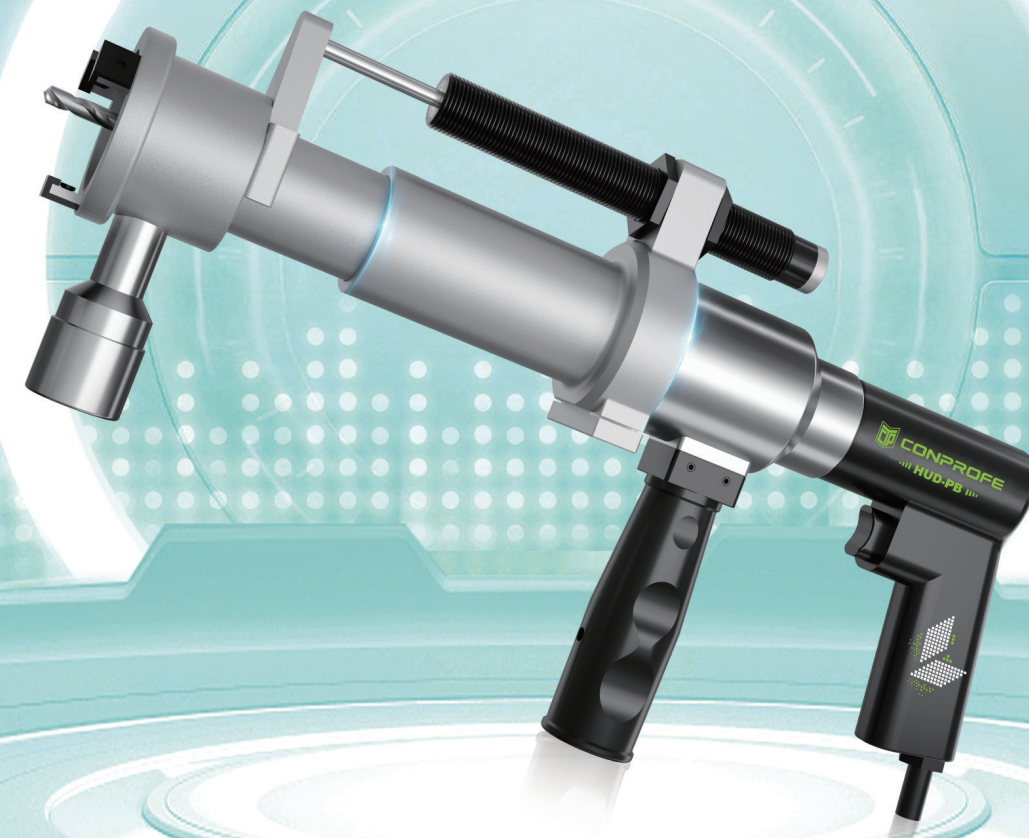

Conprofe Technology Group Co., Ltd.

Website: www.conprofecnc.com

E-mail: sales-international@conprofetech.com

Tel: +86-20 3861 9084

Address: No.6, 2nd Nanyun Road, Science City, Hi-tech
Development Zone, Guangzhou, 510663, P.R.C



Website



WhatsApp



LinkedIn

© 2024 Conprofe Technology Group Co., Ltd. All Rights Reserved.
VE2.1

The information given is not binding. Actual products and mutual agreement shall prevail. Reprinting of any text and illustrations requires written authorization of Conprofe.

Product Highlights

- 

Ultrasonic amplitude from **0.5μm to 18μm**
Applicable to **a wide range of materials**
- 

Significant tool wear reduction
Longer tool life
- 

Minimized delamination and fiber pull-out
Hole quality improvement
- 

Ergonomic design for
more stable handheld drilling
- 

Reduced cutting force
Lower physical labor intensity
- 

Flexible for mobile operation
in limited space


Applicable Materials

CFRP, GFRP, Titanium Alloy, Stainless Steel, Superalloy, Aluminum Alloy, etc.


Ultrasonic Drilling and Milling

- The periodical separation between the drill bit and the workpiece generated by ultrasonic vibration effectively reduces the cutting force.
- Better chip breaking and evacuation facilitate heat dissipation and thus lower the cutting temperature.


Comparison of Cutting Force

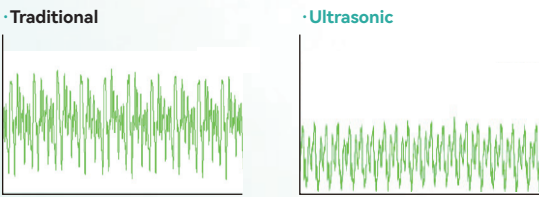

Comparison of Chip-Removing Performance

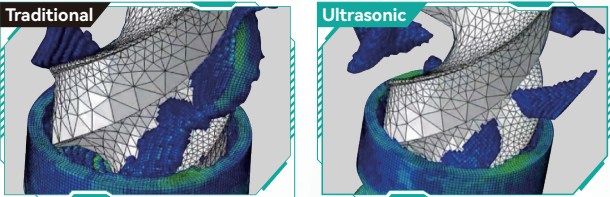


Application Case — Carbon Fiber Reinforced Plastic (CFRP) Plate Drilling

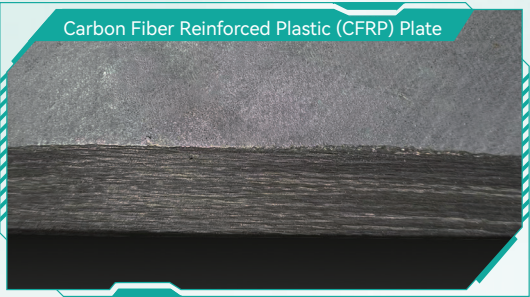

Dimension: 350 (L) × 260 (W) × 5 (T) mm

- **Traditional Drilling**
Fiber pull-out and delamination at the exit hole edges, with a tearing length of **6.51mm**
- **Ultrasonic Drilling**
Better hole quality with a tearing length of 0.75mm, an improvement of 88%

»» Comparison of Tearing Length under Different Ultrasonic Power Output Values

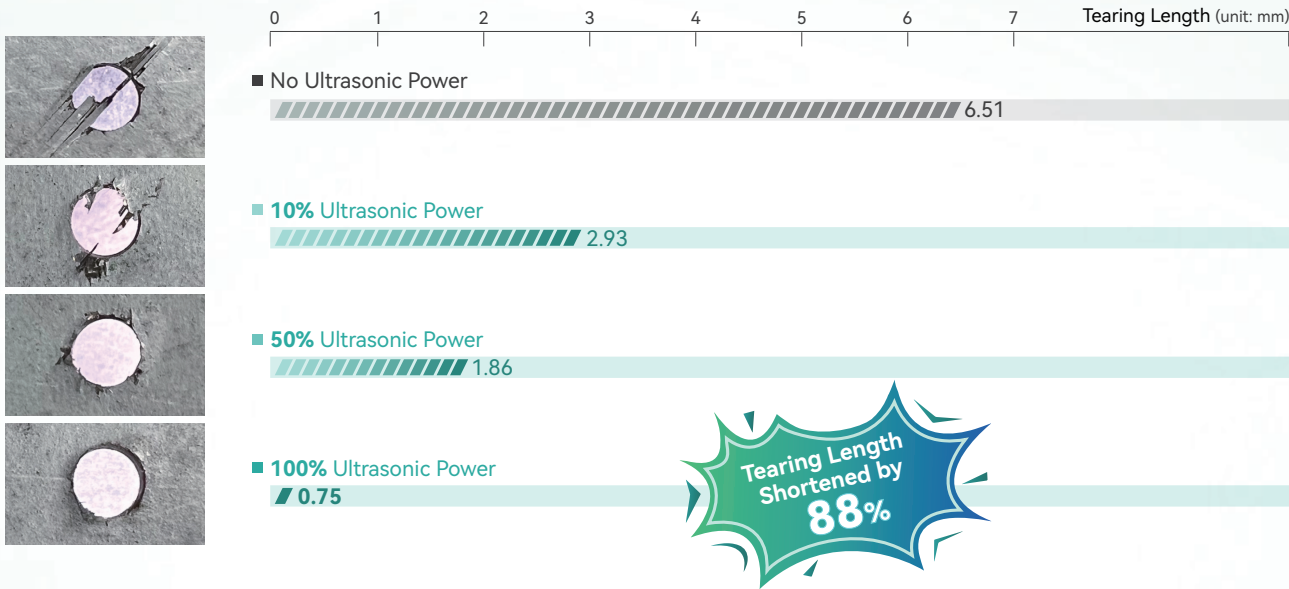

Technical Parameters

Item	Unit	Value
Ultrasonic Frequency	kHz	15-30
Amplitude	μm	16
Max. Speed	rpm	18,500
Max. Power	W	230
Clamping Range	mm	Φ2-Φ8
Customized Clamping Spec.	-	Quick Change Chuck
Air Pressure	Mpa	0.63
Operating Voltage	V	AC220
Ultrasonic Drill Dimension	mm	179 (L) ×47 (W) ×132 (H)
Ultrasonic Generator Dimension	mm	227 (L) ×350 (W) ×107.4 (H)